


# Mini Roll Down


Item no 289.701 - 289.702

## TECHNICAL DATA

|                            |                                                                       |                                                                       |
|----------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>MODEL:</b>              | Mini Roll Down - SLOW                                                 | Mini Roll Down - FAST                                                 |
| <b>ITEM NO.:</b>           | 289.701                                                               | 289.702                                                               |
| <b>DIMENSIONS (L×W×H):</b> | Tube lenght max. 4m [13.1 ft] x 150 x 295 mm (5,9 x 11,6 in)          | Tube lenght max. 4m [13.1 ft] x 150 x 295 mm (5,9 x 11,6 in)          |
| <b>POWER SUPPLY:</b>       | 100-240V AC 50-60 Hz                                                  | 100-240V AC 50-60 Hz                                                  |
| <b>POWER CONSUMPTION:</b>  | 150 Watt                                                              | 150 Watt                                                              |
| <b>POWER INLET:</b>        | Neutrik powerCON TRUE1 NAC3PX (F/M)                                   | Neutrik powerCON TRUE1 NAC3PX (F/M)                                   |
| <b>DMX CONTROL SIGNAL:</b> | DMX 512 1990 + DMX512A / 6 channels used                              | DMX 512 1990 + DMX512A / 6 channels used                              |
| <b>DMX CONNECTION:</b>     | 5 pole XLR, male & female                                             | 5 pole XLR, male & female                                             |
| <b>LIFTING HEIGHT:</b>     | Adjustable 0.5-20m (1,64 x 65,6 ft )                                  | Adjustable 0.5-20m (1,64 x 65,6 ft )                                  |
| <b>LIFTING CAPACITY:</b>   | 7 kg (15,4 lb)                                                        | 3 kg (6.6 lb)                                                         |
| <b>LIFTING SPEED:</b>      | Variable, 2.5-26 cm/s (1.0-10.2 in/s)                                 | Variable, 5 - 61 cm/s (2.0 - 24.0 in/s)                               |
| <b>MINIMUM LOAD:</b>       | None                                                                  | None                                                                  |
| <b>NOISE EMISSION:</b>     | ~55 dB                                                                | ~55 dB                                                                |
| <b>OWN WEIGHT:</b>         | 7.5 kg (16.5 lb) *with 1m tube mounted<br>Tube 1.3 kg/m (0.87 lb/ft.) | 7.5 kg (16.5 lb) *with 1m tube mounted<br>Tube 1.3 kg/m (0.87 lb/ft.) |
| <b>MOUNTING CLAMP:</b>     | 2x Slim eye coupler 50 mm (2 in)                                      | 2x Slim eye coupler 50 mm (2 in)                                      |
| <b>MOTOR:</b>              | 24 V DC, 54 W                                                         | 24 V DC, 92 W                                                         |
| <b>DUTY CYCLE:</b>         | 50% > 30min                                                           | 50% > 30min                                                           |

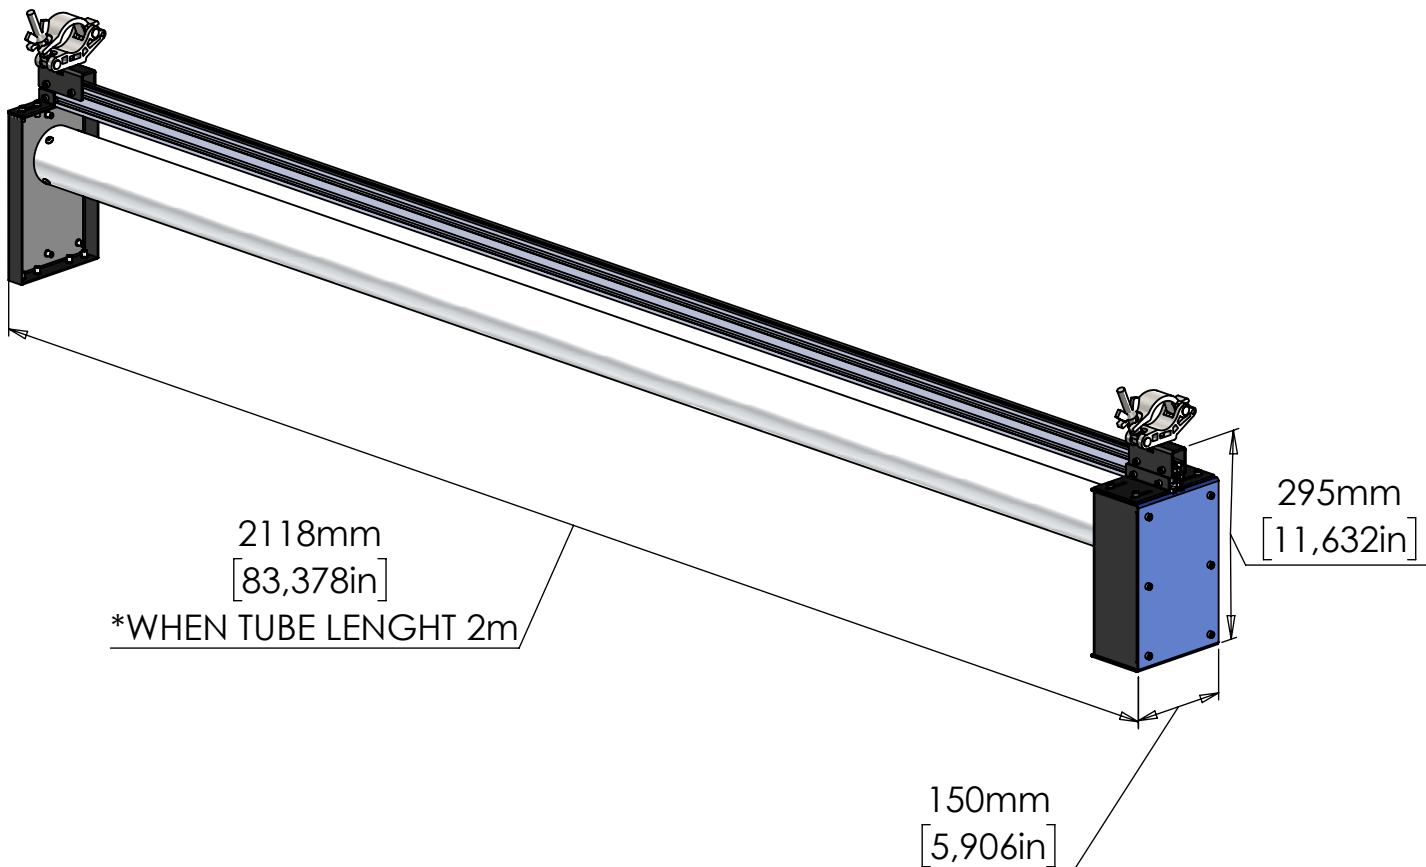


**FRONT VIEW**

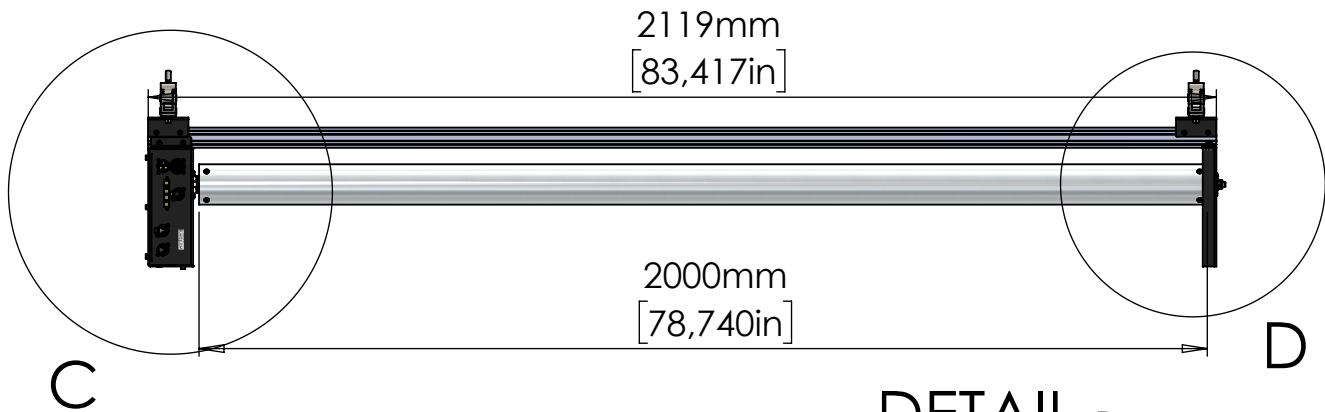


**DETAIL C**

SCALE 2 : 15

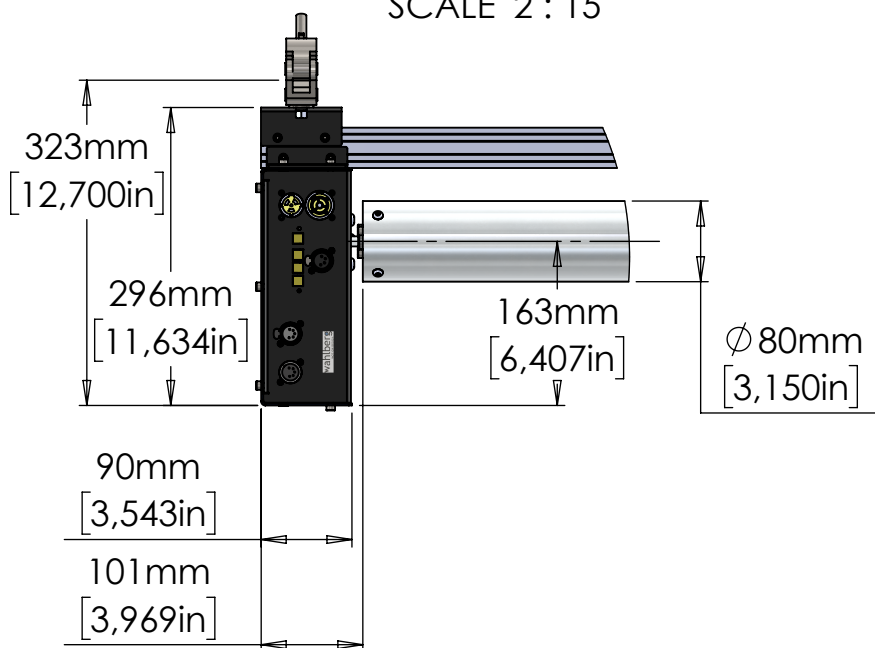


**DETAIL D**

SCALE 2 : 15

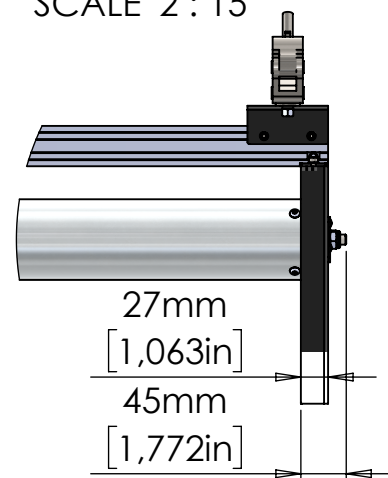

**TOP VIEW**

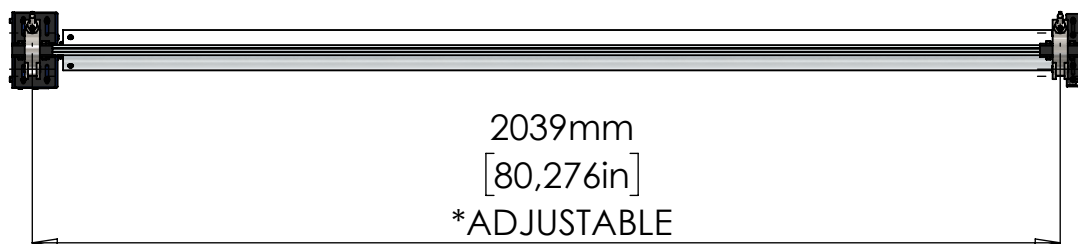

**SIDE VIEW**

