


LINUS10-C Data Sheet

LINUS10-C

4-Channel Loudspeaker
Management Amplifier

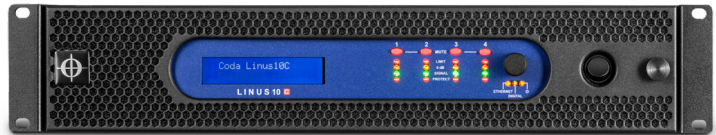

The LINUS10-C is a 4-channel high-power loudspeaker management amplifier with networking and DSP, delivering 10,000 W total RMS power in a lightweight 19-inch / 2U package.

Offering four output channels, the LINUS10-C is an efficient and compact amplifier solution that occupies just 2 rack spaces, incurs a reduced cost, and has a reduced weight when compared to previous 4-channel amplifier solutions.

The exceptional power of the LINUS10-C class-D output stage topology ensures maximum headroom and optimal system performance for installed CODA Audio systems. This amplifier technology is combined with SHARC floating-point processing. This DSP features vast processing power which enables the integration of sophisticated audio algorithms. The advanced signal processing includes IIR and phase-linear FIR filters for perfect linearity and superior sound performance as well as look-ahead and various protection limiters for increased system headroom and secure system performance.

The LINUS10-C contains presets for use with CODA Audio loudspeaker systems, enabling quick setup time and providing the utmost in audio clarity and performance. In addition to FOH system control, LINUS10-C is suitable for monitor systems, delay systems, and zoned systems. Factory presets for compatible CODA Audio systems (D-Series, G-Series, CoRAY, HOPS8, CUE-Series, TiRAY, ViRAY, OMNIO5, PW-Subs, U-Subs) are included, 10 user preset slots are available.

LINUS10-C Features

- ⊕ Very high output power (10,000 W RMS total)
- ⊕ SHARC floating point DSP @ 96 kHz
- ⊕ LiNET-C – 4x freely configurable digital audio signals over a CAT5 cable
- ⊕ LINUS Control Ethernet interface provides network control and monitoring of amplifiers
- ⊕ Advanced IIR and linear-phase FIR filters
- ⊕ Efficient Class D design for superior sound performance
- ⊕ Lightweight power supply for 100 V / 115 V / 230 V





LINUS10-C Data Sheet



LINUS10-C

GENERAL	
Number of output channels	4
Output stage	Class D
Internal samplerate / bit-depth	96 kHz / 24 bit
Signal-to-noise ratio (22 Hz - 20 kHz, 4 Ω - analogue input)	>112 dB (unweighted) >115 dB (A-weighted)
Signal-to-noise ratio (22 Hz - 20 kHz, 4 Ω - digital input)	> 114 dB (unweighted) > 117 dB (A-weighted)
Frequency response (8 Ω load, with CLEAR preset)	20 Hz-20 kHz = (+0.5 dB / -1.0 dB)
THD+N (4 Ω load @ 120 W output power)	20 Hz-17 kHz = < 0.1%
Latency (input to loudspeaker output)	min. 2.70 ms AES/EBU input min. 2.00 ms Analogue input
Protection circuits	Inrush current limiter, Thermal limiter, Output DC, SMPS over-current, Output overload
LED indicators	Mute status, Limit, 0 dB, Signal, Protection, Ethernet control active, Digital signal locked, Power on
Ethernet connection	1x 10 Mbps RJ45
AC MAINS	
AC mains input connector	Neutrik 32A powerCON*
AC mains input voltage** (230 V internal jumper setting)	180 V = Minimum 230 V = Nominal 264 V = Maximum
AC mains input voltage** (115 V internal jumper setting)	85 V = Minimum 115 V = Nominal 132 V = Maximum
AC mains frequency	47 - 63 Hz
Power consumption* (1/4 power = 600 W @ 4Ω to represent typical music signal)	Amplifier in standby = 47 W Amplifier idle = 249 W Amplifier 1/4 power = 3146 W
*typical values - some variation may exist due to component intolerances	
** voltage range should not be exceeded. Amp. output power will degrade below nominal voltage & increase above	

INPUT	
Input sources	Analogue & AES/EBU
An. input impedance (balanced)	30 kΩ
Max. input level (an. differential)	+15 dBu / 4.36 Vrms
Input connections	4x XLR3 Analogue IN / 1x RJ45 Analogue IN (4x CH) / 1x RJ45 Analogue LINK (4x CH) / 1x RJ45 Digital IN (4x CH) / 1x RJ45 Digital Link (4x CH)
Supported digital input formats (Internal SRC)	32 kHz / 44.1 kHz / 48 kHz / 88.2 kHz / 96 kHz / 176.4 kHz / 192 kHz
OUTPUT	
RMS output power* (20 Hz - 20 kHz, THD < 0.1%) (All channels driven)	1400 W @ 8 Ω / 2500 W @ 4 Ω 3100 W @ 2.7 Ω / 3700 W @ 2 Ω
Peak output power* (20 Hz - 20 kHz, 6 dB Crest Factor) (All channels driven)	3200 W _{pk} @ 8 Ω / 5200 W _{pk} @ 4 Ω 5800 W _{pk} @ 2.7 Ω / 5000 W _{pk} @ 2 Ω
Max. output voltage*	+/- 170 V _{pk}
Max. output current*	+/- 52 A _{pk}
Damping factor (8 Ω load, 1 kHz & below)	> 800
Min. output load	2 Ω nom
Power output connections	2x Neutrik NL4 speakON® 1x Neutrik NL8 speakON®
THERMAL	
Operating temperature	+5°C to 55°C / 41°F to 131°F
Thermal output (BTU/h)	696.08 = Idle / 1910.80 = 20% / 3739.71 = 50% / 6776.51 = 100%
Thermal output (kWh)	0.204 = Idle / 0.560 = 20% / 1.096 = 50% / 1.986 = 100%
Cooling	2x thermally controlled fans Hot air expelled at rear
PHYSICAL	
Dimensions (W x H x D)	483.5x88x454mm / 19x3.4x17.8"
Shipping dimensions (W x H x D)	675x130x560 mm / 26.5x5.1x22"
Net weight	14.3 kg / 31.5 lbs
Shipping weight	17.5 kg / 38.6 lbs

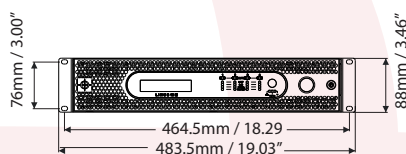

CODA AUDIO GmbH

Boulevard der EU 6, 30539 Hannover, Expo Park, Germany

E-Mail: contact@codaaudio.com Website: www.codaaudio.com

CODA
CODA AUDIO

